

Features

Multi-function and mono-function timer range

- 80.01 - Multi-function & multi-voltage**
- 80.11 - On-delay, multi-voltage**

- 17.5 mm wide
- Six time scales from 0.1s to 24h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.01 / 80.11
Screw terminal



FOR UL RATINGS SEE:
"General technical information" page V


For outline drawing see page 6

80.01




- Multi-voltage
- Multi-function

- AI:** On-delay
- DI:** Interval
- SW:** Symmetrical flasher (starting pulse on)
- BE:** Off-delay with control signal
- CE:** On- and off-delay with control signal
- DE:** Interval with control signal on



Wiring diagram
(without control signal)




Wiring diagram
(with control signal)

80.11



- Multi-voltage
- Mono-function

- AI:** On-delay



Wiring diagram
(without control signal)

Contact specification

Contact configuration	1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A 16/30	16/30
Rated voltage/Maximum switching voltage V AC	250/400	250/400
Rated load AC1	VA 4,000	4,000
Rated load AC15 (230 V AC)	VA 750	750
Single phase motor rating (230 V AC)	kW 0.55	0.55
Breaking capacity DC1: 30/110/220 V	A 16/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA) 500 (10/5)	500 (10/5)
Standard contact material	AgCdO	AgCdO

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	12...240	24...240
	V DC	12...240	24...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8 / < 1	< 1.8 / < 1
Operating range	V AC	10.8...265	16.8...265
	V DC	10.8...265	16.8...265

Technical data

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h	
Repeatability	%	± 1	± 1
Recovery time	ms	100	100
Minimum control impulse	ms	50	—
Setting accuracy-full range	%	± 5	± 5
Electrical life at rated load in AC1	cycles	50·10 ³	50·10 ³
Ambient temperature range	°C	-10...+50	-10...+50
Protection category		IP 20	IP 20

Approvals (according to type)



Features

Multi-function and multi-voltage solid-state output timer

- 17.5 mm wide
- Six time scales from 0.1s to 24h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- Multi-voltage output (24...240 V AC/DC), independent from the input voltage
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- Multi-voltage input with "PWM clever" technology

80.71
Screw terminal



For outline drawing see page 6

Output circuit

Contact configuration	
Rated current	A
Rated voltage	V AC/DC
Switching voltage range	V AC/DC
Rated load AC15	A
Rated load DC1	A
Minimum switching current	mA
Max. "OFF-state" leakage current	mA
Max. "ON-state" voltage drop	V

Input circuit

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power	VA (50 Hz)/W	1.3/1.3
Operating range	V AC	19...265
	V DC	19...265

Technical data

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h
Repeatability	%	± 1
Recovery time	ms	100
Minimum control impulse	ms	50
Setting accuracy-full range	%	± 5
Electrical life	cycles	100·10 ⁶
Ambient temperature range	°C	-20...+50
Protection category		IP 20


Approvals (according to type)

80.71




- Multi-voltage
- Multi-function

- AI:** On-delay
- DI:** Interval
- SW:** Symmetrical flasher (starting pulse on)
- BE:** Off-delay with control signal
- CE:** On- and off-delay with control signal
- DE:** Interval with control signal on



Wiring diagram (without control signal)



Wiring diagram (with control signal)

Features

Mono-function timer range

80.61 - Power off-delay (True off-delay), multi-voltage

80.82 - Star-delta, multi-voltage

- 17.5 mm wide
- Rotary range selector, and timing trimmer
- Four time scales from 0.05s to 3 min (type 80.61)
- Six time scales from 0.1s to 20min (type 80.82)
- High input/output isolation
- 35 mm rail (EN 60715) mount

80.61 / 80.82
Screw terminal



FOR UL RATINGS SEE:
"General technical information" page V


For outline drawing see page 6

80.61



- Multi-voltage
- Mono-function

BI: Power off-delay (True off-delay)




Wiring diagram
(without control signal)

80.82



- Multi-voltage
- Mono-function
- Transfer time can be regulated (0.05...1)s

SD: Star-delta



Wiring diagram
(without control signal)

Contact specification

Contact configuration		1 CO (SPDT)	2 NO (DPST-NO)
Rated current/Maximum peak current	A	8/15	6/10
Rated voltage/Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2,000	1,500
Rated load AC15 (230 V AC)	VA	400	300
Single phase motor rating (230 V AC)	kW	0.3	—
Breaking capacity DC1: 30/110/220 V	A	8/0.3/0.12	6/0.2/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	500 (12/10)
Standard contact material		AgNi	AgNi

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240	24...240
	V DC	24...220	24...240
Rated power AC/DC	VA (50 Hz)/W	< 0.6/ < 0.6	< 1.3/ < 0.8
Operating range	V AC	16.8...265	16.8...265
	V DC	16.8...242	16.8...265

Technical data

Specified time range		(0.05...2)s, (1...16)s, (8...70)s, (50...180)s	(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min
Repeatability	%	± 1	± 1
Recovery time	ms	—	100
Minimum control impulse	ms	500 (A1-A2)	—
Setting accuracy-full range	%	± 5	± 5
Electrical life at rated load in AC1	cycles	100·10 ³	60·10 ³
Ambient temperature range	°C	-10...+50	-10...+50
Protection category		IP 20	IP 20

Approvals (according to type)



Ordering information

Example: 80 series, modular timers, 1 CO (SPDT) - 16 A, supply rated at (12...240)V AC/DC.

8 0 . 0 1 . 0 . 2 4 0 . 0 0 0 0

Series

Type

- 0 = Multi-function (AI, DI, SW, BE, CE, DE)
- 1 = On-delay (AI)
- 2 = Interval (DI)
- 4 = Off-delay with control signal (BE)
- 6 = Power off-delay (True off-delay) (BI)
- 7 = Multi-function with solid state output (AI, DI, SW, BE, CE, DE)
- 8 = Star-delta (SD)
- 9 = Asymmetrical flasher (LI, LE)

Versions

0 = Standard

Supply voltage

- 240 = (12 ... 240)V AC/DC (80.01, 80.91)
- 240 = (24 ... 240)V AC/DC (80.11, 80.21, 80.41, 80.71, 80.82)
- 240 = (24...240)V AC, (24...220)V DC (80.61)

Supply version

0 = AC (50/60 Hz)/DC


No. of poles

- 1 = 1 CO (SPDT)
- 1 = 1 NO (SPST-NO), type 80.71 only
- 2 = 2 NO (DPST-NO), type 80.82 only

Technical data

Insulation						
Dielectric strength	between input and output circuit	V AC	80.01/11/21/41/82/91 4,000	80.61 2,500	80.71 2,500	
	between open contacts	V AC	1,000	1,000	—	
Insulation (1.2/50 µs) between input and output		kV	6	4	4	
EMC specifications						
Type of test			Reference standard	80.01/11/21/41/61/71/91	80.82	
Electrostatic discharge	contact discharge		EN 61000-4-2	4 kV	4 kV	
	air discharge		EN 61000-4-2	8 kV	8 kV	
Radio-frequency electromagnetic field (80 ÷ 1,000 MHz)			EN 61000-4-3	10 V/m	10 V/m	
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals			EN 61000-4-4	4 kV	4 kV	
Surges (1.2/50 µs) on Supply terminals	common mode		EN 61000-4-5	4 kV	4 kV	
			EN 61000-4-5	4 kV	4 kV	
	on start terminal (B1)	common mode		EN 61000-4-5	4 kV	4 kV
		differential mode		EN 61000-4-5	4 kV	4 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals			EN 61000-4-6	10 V	10 V	
Radiated and conducted emission			EN 55022	class B	class A	
Other data						
Current absorption on signal control (B1)			< 1 mA			
Power lost to the environment	without contact current	W	1.4			
	with rated current	W	3.2			
Screw torque		Nm	0.8			
Max. wire size			solid cable	stranded cable		
			mm ²	1x6 / 2x4	1x4 / 2x2.5	
			AWG	1x10 / 2x12	1x12 / 2x14	


Accessories



Sheet of marker tags, for types 80.82, plastic, 24 tags, 9x17 mm

020.24

020.24




Sheet of marker tags, for types 80.01/11/21/41/61/71, plastic, 72 tags, 6x12 mm

060.72


060.72

Outline drawings


80.01
Screw terminal

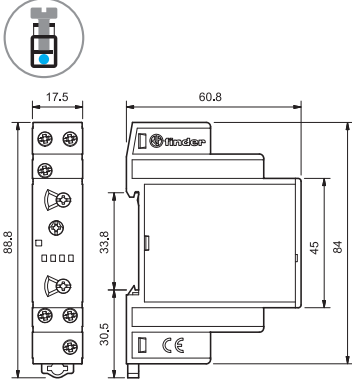


80.11
Screw terminal

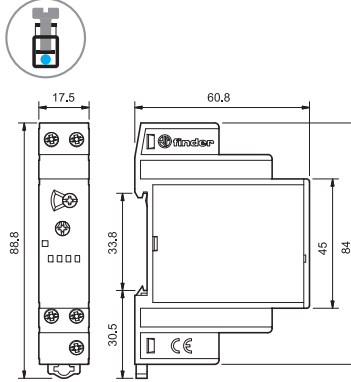


80.21
Screw terminal

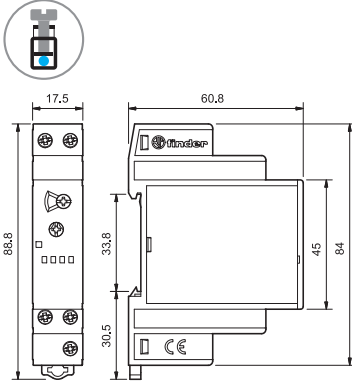


80.41
Screw terminal

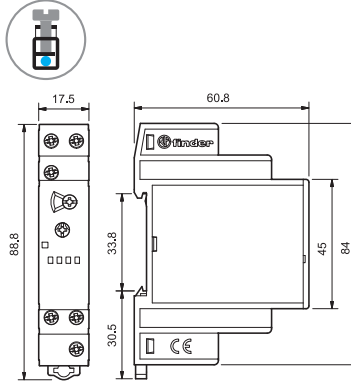


80.91
Screw terminal

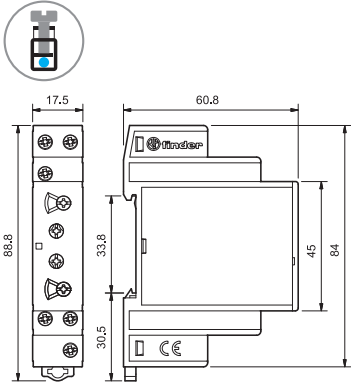


80.71
Screw terminal

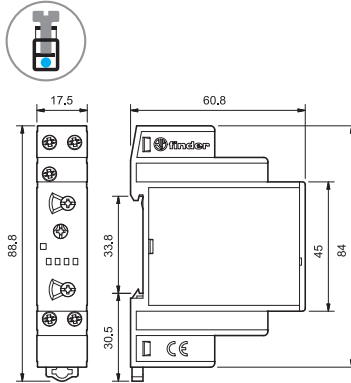

80.61
Screw terminal

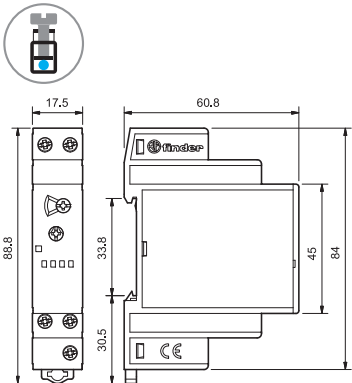

80.82
Screw terminal

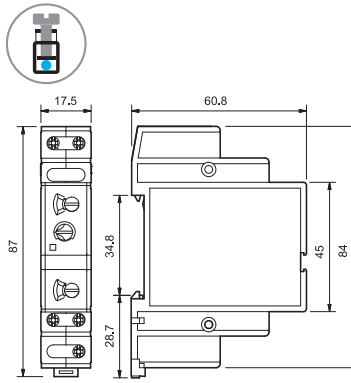

H

Functions

U = Supply voltage

S = Signal switch

— = Output contact


LED*	Supply voltage	NO output contact	Contacts	
			Open	Closed
	OFF	Open	15 - 18	15 - 16
	ON	Open	15 - 18	15 - 16
	ON	Open (Timing in Progress)	15 - 18	15 - 16
	ON	Closed	15 - 16	15 - 18

* The LED on type 80.61 is illuminated only when the supply voltage is applied to the timer; during the timing period the LED is not illuminated.


Wiring diagram

Without control signal = Start via contact in supply line (A1).
With control signal = Start via contact into control terminal (B1).

Without control signal

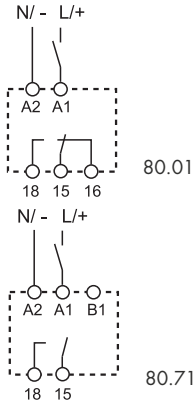

Type
80.01
80.71

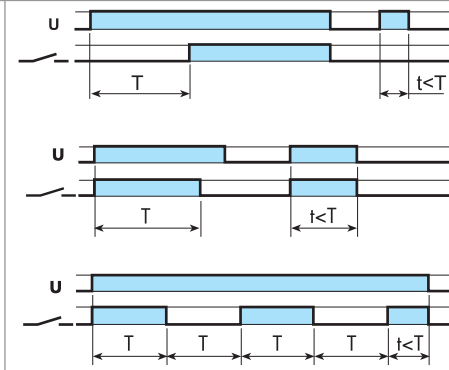

(AI) On-delay.

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.


(DI) Interval.

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.


(SW) Symmetrical flasher (starting pulse on).

Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).

With control signal

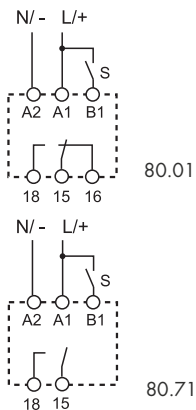

80.01
80.71

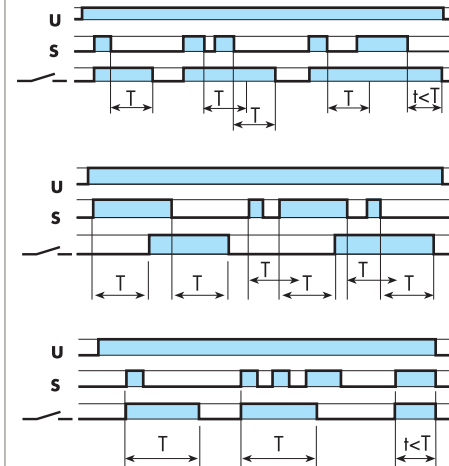

(BE) Off-delay with control signal.

Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

(CE) On- and off-delay with control signal.

Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.

(DE) Interval with control signal on.



Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

NOTE: The function must be set before energising the timer.

• Possible to control an external load, such as another relay coil or timer, connected to the control signal terminal B1.

* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1).



** A voltage other than the supply voltage can be applied to the command Start (B1), example:
A1 - A2 = 230 V AC
B1 - A2 = 12 V DC




Functions

Wiring diagram

Without control signal




Type
80.11



(AI) On-delay.

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.


80.21



(DI) Interval.

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.


80.61



(BI) Power off-delay (True off-delay).

Apply power to timer (minimum 500ms). Output contacts transfer immediately. Removal of power initiates the preset delay, after which time the output contacts reset.


80.82

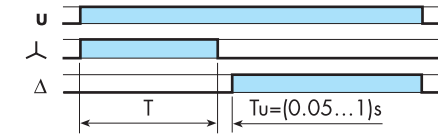


(SD) Star-delta.

Apply power to timer. The star contact (Λ) closes immediately. After preset delay has elapsed the star contact (Λ) resets. After a further transfer time variable from (0.05...1)s the delta contact (Δ) closes and remains in that position, until reset on power off.

With control signal




80.41

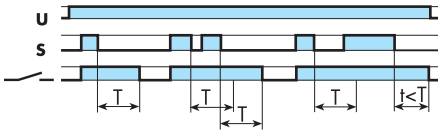


(BE) Off-delay with control signal.

Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

Without control signal




80.91




(LI) Asymmetrical flasher (starting pulse on).

Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ON (T1) and OFF (T2) times are independently adjustable.

With control signal




80.91

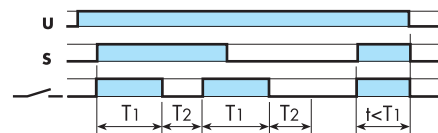


(LE) Asymmetrical flasher (starting pulse on) with control signal

Power is permanently applied to the timer. Closing Signal Switch (S) causes the output contacts to transfer immediately and cycle between ON (T1) and OFF (T2), until opened.


H



• Possible to control an external load, such as another relay coil or timer, connected to the control signal terminal B1.



* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1).



** A voltage other than the supply voltage can be applied to the command Start (B1), example:
A1 - A2 = 230 V AC
B1 - A2 = 12 V DC