

# ELASTICATED CHINSTRAP™

STANDARD & DELUXE CHINSTRAP

## TECHNICAL SPECIFICATION

PRODUCT CODE: DELUXE: AHV000-500-000 & STANDARD: AHV001-100-000

WIDE ELASTIC CHINSTRAP WITH CHIN CUP (DELUXE ONLY), RELEASES AUTOMATICALLY WITH FORCES BETWEEN 150 & 250 NEWTONS

HEAD PROTECTION

ACCESSORIES

### INSTRUCTIONS FOR USE

Insert clip upstand through chinstrap attachment points on shell ensuring it points away from the head

Fold over and close the clip around the attachment points and push the upstand through the corresponding hole in the other end of the clip until it shuts fully

Fit the Head Protection Device in the appropriate manner, then fit the chinstrap underneath the chin and seat as required on it

### DIMENSIONS & SPECIFICATIONS OF CHINSTRAP

Width: 85mm

Height: 38mm

Weight: 35g (Approx.)


### AVAILABLE FOR:



### DIMENSIONS OF OUTER PACKAGING

Quantity: 400

Weight: 7.38kg (Approx.)

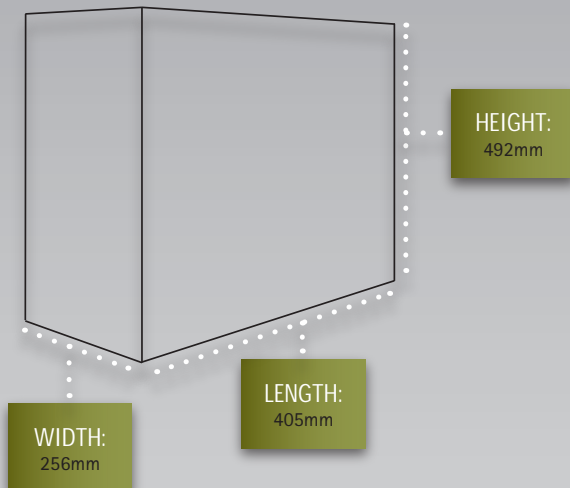

### CLEANING & MAINTENANCE

The chinstrap may be cleaned with soap and warm water and dried with a soft cloth


Do not clean with chemical or abrasive cleaners

The chinstrap should be stored out of direct sunlight away from chemicals and extremes of temperature

### CONFORMITY

When fitted to JSP Industrial Safety Helmets, meets the requirements of EN397

When fitted to JSP Industrial Bump Caps, meets the requirements of EN812

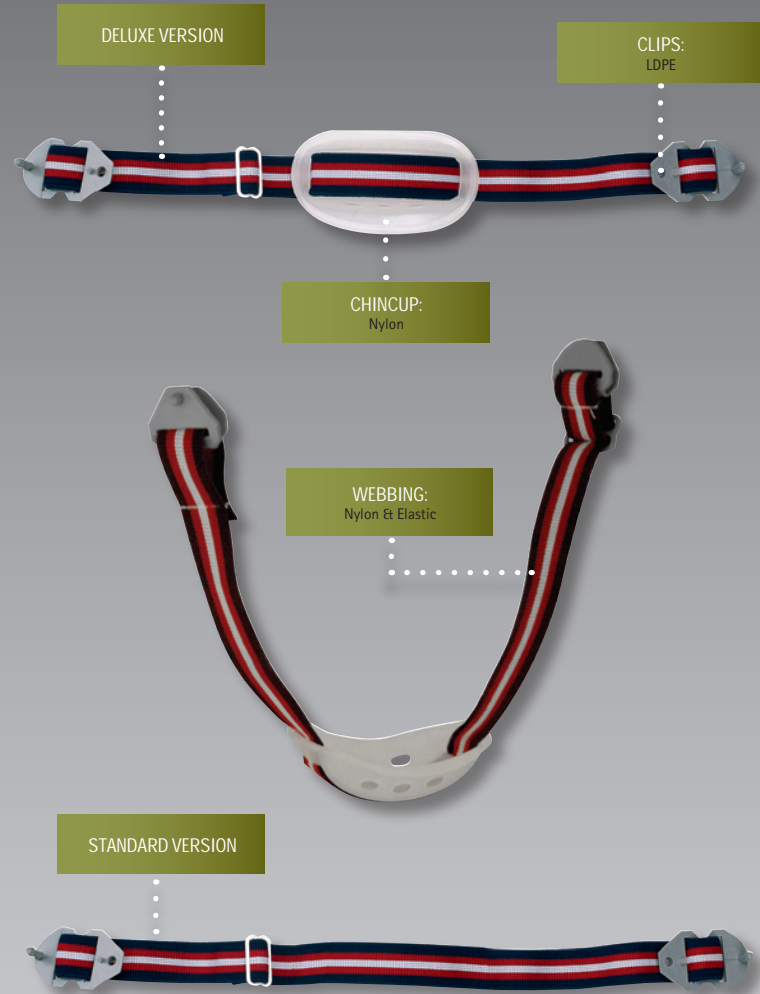

### LIMITATIONS OF USE

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The chinstrap, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove the cap and seek medical advice

This chinstrap should only be fitted to JSP Head Protection Devices

A JSP Chinstrap is a single fitting only, removal once assembled to a Head Protection Device will damage the chinstrap clips

